

SUMMIT 9700



Peak Performance

The Summit 9700 is a superior slider with the industry's best feature set. Summit windows are a great option when ease of use, durability and maximum ventilation are desired.

SUMMIT 9700

Features

- Acrylic Wrapped Exterior and Interior
- Now in 4 New Exterior Colours
- Energy Efficient
- Sleek Design
- Contemporary Styling

Specifications

- 2-3/4 multi-chambered & low-maintenance extruded uPVC frame and sash with fully sealed fusion-welded corners
- Easy installations with integral pre-punched nailing flange
- Permanently resilient weather stripping, profiled for a continuous tight-fitting seal
- 2020 ENERGY STAR® compliant

Options

| Operating style | Frame Exterior colour | Interior colour | Hardware | Grille pattern | Grille colour | Grille widths | Interior SDL colour | SDL widths |
|--|--|---|--|--|--|--------------------------------------|---|------------------------------|
| Awning Casement Fixed Hung Picture Slider | White Wicker Black Jet Black Anthracite Grey Architectural Brown Chocolate Brown Clear Anodized Mattrex Kitami Oak Concrete Oak Malt Oak Toffee Pebble Bone White Forest Green Slate Grey | White Wicker Jet Black Stainable Fir | White Wicker Brushed Nickel Bronze Black | Double Ladder Double Perimeter Ladder Perimeter Rectangular Triple Ladder | White Wicker Black Patina Lead Gold | 1" 5/16" 5/8" Georgian 5/8" | White Wicker Jet Black Stainable Fir | 1-1/4" 7/8" 2" Mullion |
| | | | | | | | | |

| Exterior simulated divided colours | Brickmould type | Brickmould colour | Glass system | Optional glass types |
|---|--|---|--|---|
| White Wicker Jet Black Anthracite Grey Architectural Brown Chocolate Brown Clear Anodized Mattrex Kitami Oak Concrete Oak Malt Oak Toffee Pebble Bone White Forest Green Slate Grey | 1-1/2" Aluminium 2" Aluminium 1-1/2" New Construct 1-1/2" Reno 2" Reno 2" Reno 2" Set Back Reno Industrial Aluminium Heavy Duty Flange | White Wicker Black Jet Black Anthracity Grey Architecture Brown Chocolate Brown Clear Anodized Mattrex Kitami Oak Concrete Oak Malt Oak Toffee Pebble Bone White Forest Green Slate Grey | Clear - Dual Clear - Triple Low-E / HS1-Dual Low-E / HS2-Triple Low-E / HS3-Triple Sunstop / HS4-Dual Sunstop / HS6-Triple System 5 / HS1V-Dual System 5 / HS4V-Dual | Opaque Pin obscure Rain Bronze Grey |
| • • • • • • • • • • • • • • • • • • | | | | |

TT

Ladder

















Double Ladder


Double Perimeter

Perimeter

Triple Ladder

SUMMIT 9700

COLOURS MAY LOOK DIFFERENT DEPENDING UPON VIEWING DEVICE OR PRINTING PLATFORM

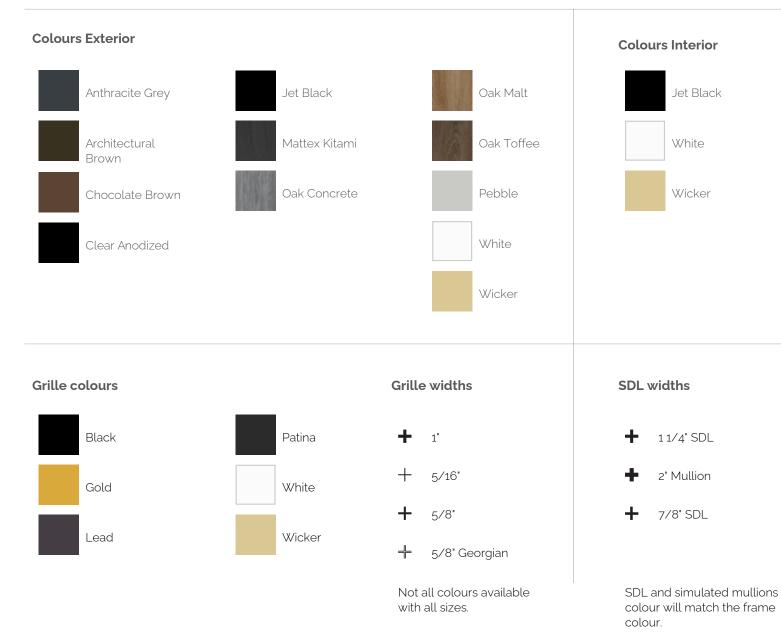

Hardware / finish



Encore Black




Encore White



Encore Wicker

Operating styles



Glossary

Brickmould

Brickmould is attached to the window or door frame on the exterior of a home. It covers the gap between your home's exterior and the window or door frame.

Grille

Cross-bars in between the panes of glass to give the impression the window is divided into a number of smaller panes.

Frame

Our side part of a window consisting of jambs and sills that encloses a window sash.

Simulated Divided Lites (SDL)

Decorative bars that are placed on the exterior of the glass. This gives the look of divided glass without compromising performance and energy efficiency.

Mullion

A mullion is the vertical piece that connects side-by-side units of a window.

Sash

The sash is the part of the window holding the glass in place when the window is being opened. They are available in sliding or hinged models, and create a tight seal with the frame when the window is closed.

Argon Gas

Argon is an inert gas, non-toxic, clear and odourless. Used to fill the space between panes of glass, it minimizes convective currents reduces the chance of glass collecting frost on cold winter days.

Dual Clear Glass

Dual Clear Glass is two panes of glass with no special coating applied. The panes are spaced a ½ inch apart and the air between the panes acts as an insulation barrier, making your windows more energy efficient.

SunStop

SunStop uses two layers of Low-E coating to block out the sun's heat, light and UV rays. Perfect for south and west-facing windows, this coating keeps your home cool in the summer and warmer in the winter with superior insulation performance.

Triple Pane

Also spaced a ½ inch apart, these three panes provide more insulation than dual pane when it comes to energy efficiency. Enjoy lower heating costs, virtually no condensation and an excellent sound barrier, giving your home added privacy.

Low-E

Low emissivity is a clear coating that reduces heat loss by reflecting furnace heat back into a room, allowing lots of outside solar energy to pass into your home. In winter, it can even reduce the demands on your furnace. Low-E can offer 35%-105% better insulation when combined with dual/triple pane glass.

Thermal & Structural Ratings

Energy efficiency for windows is a crucial aspect of modern building design, aiming to minimize energy loss and reduce utility costs while enhancing comfort. In Canada, the North American Fenestration Standard (NAFS) plays a significant role in setting the performance criteria for windows and doors. NAFS provides a comprehensive framework for assessing and certifying the performance of fenestration products, ensuring they meet rigorous standards for energy efficiency, durability, and weather resistance.

ENERGY STAR® CERTIFIED

ENERGY STAR is a third party assessment of the energy efficiency of products. We proudly manufacture ENERGY STAR certified products including many that qualify for the "Most Efficient" program.



Connections

in f 🛈 🔇 🕨

All Weather at Home Toll free: 800.638.5709 **allweatherathome.ca**



For more specific options, scan this QR code.

While we endeavor to ensure our information is accurate, All Weather at Home will not be held liable for any inaccuracies. All information is subject to change, errors and omissions without notice or liability. Please note all colours are not exactly as shown due to technical limitation and differences in devices and printing. Always check the website for latest product information.