







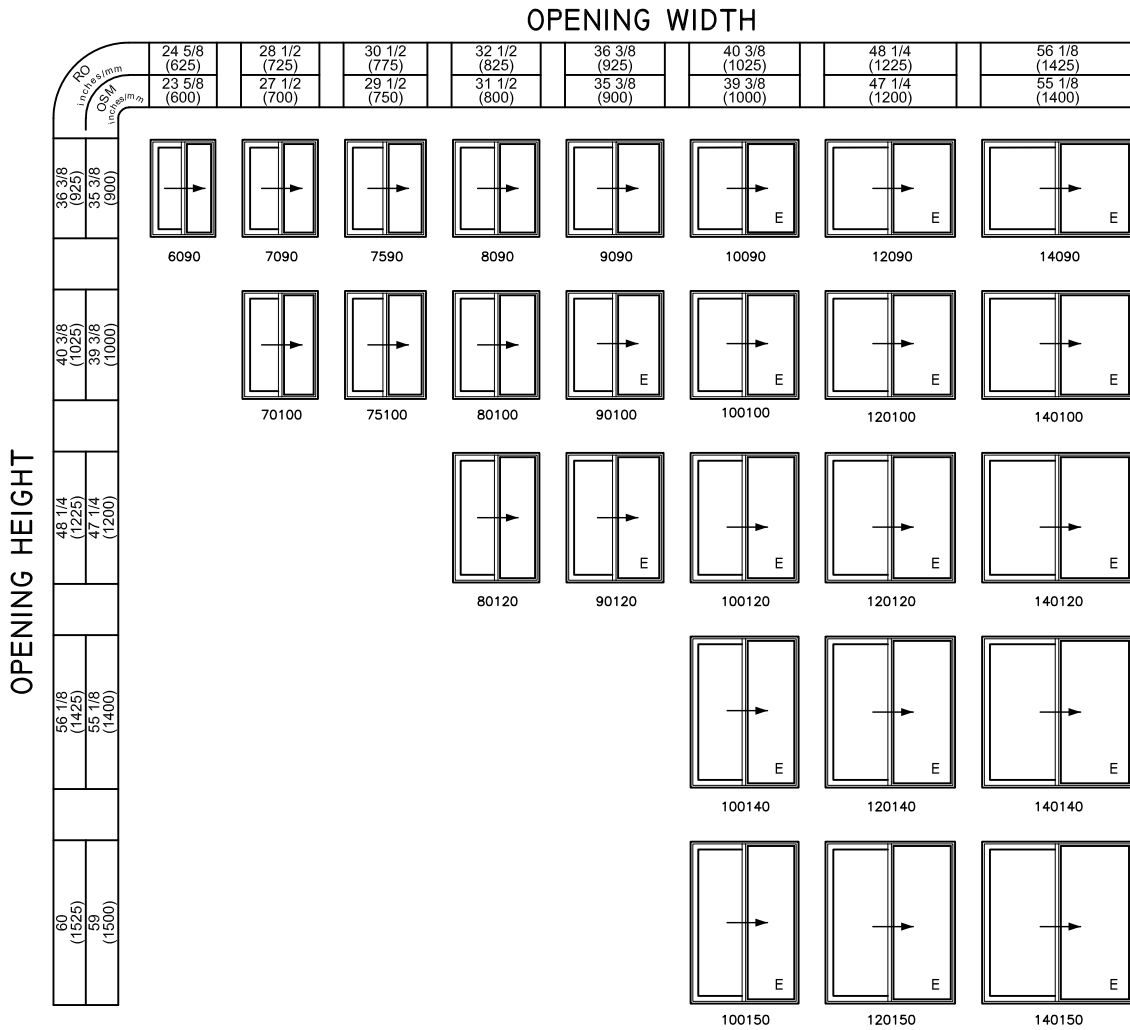






























		OPENING WIDTH							
		24 5/8 (625)	28 1/2 (725)	30 1/2 (775)	32 1/2 (825)	36 3/8 (925)	40 3/8 (1025)	48 1/4 (1225)	56 1/8 (1425)
OPENING HEIGHT	RO inches/mm	23 5/8 (600)	27 1/2 (700)	29 1/2 (750)	31 1/2 (800)	35 3/8 (900)	39 3/8 (1000)	47 1/4 (1200)	55 1/8 (1400)
	OSM inches/mm	16 3/4 (425)	15 3/4 (400)						
	20 5/8 (525)	19 5/8 (500)							
	24 5/8 (625)	23 5/8 (600)							
	28 1/2 (725)	27 1/2 (700)							
	30 1/2 (775)	29 1/2 (750)							
32 1/2 (825)	31 1/2 (800)								
		6040	7040	7540	8040	9040	10040	12040	14040
		6050	7050	7550	8050	9050	10050	12050	14050
		6060	7060	7560	8060	9060	10060	12060	14060
		6070	7070	7570	8070	9070	10070	12070	14070 E
		6075	7075	7575	8075	9075	10075	12075 E	14075 E
		6080	7080	7580	8080	9080	10080	12080 E	14080 E

E = THESE WINDOWS MEET CANADIAN EGRESS REQUIREMENTS.



E = THESE WINDOWS MEET CANADIAN EGRESS REQUIREMENTS.

		OPENING WIDTH					
		(1525)	64 (1625)	71 7/8 (1825)	29 3/4 (2025)	83 5/8 (2125)	95 1/2 (2425)
OPENING HEIGHT	16 3/4 (425)						
	15040	16040	18040	20040	21040	24040	
	20 5/8 (525)						
	15050	16050	18050	20050	21050	24050	
	21 5/8 (625)						
	15060	16060	18060	20060	21060	24060	
28 1/2 (725)							
15070	16070	18070	20070	21070	24070		
30 1/2 (775)							
15075	16075	18075	20075	21075	24075		
32 1/2 (825)							
15080	16080	18080	20080	21080	24080		

E = THESE WINDOWS MEET CANADIAN EGRESS REQUIREMENTS.

		OPENING WIDTH					
		1525	1625	1825	2025	2125	2425
OPENING HEIGHT	RO Inch/mm	59 (1500)	63 (1600)	70 7/8 (1800)	78 3/4 (2000)	82 5/8 (2100)	94 1/2 (2400)
	OSA Inch/mm	59 (1500)	63 (1600)	71 7/8 (1825)	79 3/4 (2025)	83 5/8 (2125)	95 1/2 (2425)
	36 3/8 (925)						
	35 3/8 (900)	15090	16090	18090	20090	21090	24090
	40 3/8 (1025)						
39 3/8 (1000)	150100	160100	180100	200100	210100	240100	
48 1/4 (1225)							
47 1/4 (1200)	150120	160120	180120	200120	210120	240120	
56 1/8 (1425)							
55 1/8 (1400)	150140	160140	180140	200140	210140	240140	
60 (1525)							
59 (1500)	150150	160150	180150	200150	210150	240150	

E = THESE WINDOWS MEET CANADIAN EGRESS REQUIREMENTS.

		OPENING WIDTH								
		16 3/4 (425)	20 5/8 (525)	24 5/8 (625)	28 1/2 (725)	30 1/2 (775)	32 1/2 (825)	36 3/8 (925)	40 3/8 (1025)	48 1/4 (1225)
OPENING HEIGHT	RO inches/mm	15 3/4 (400)	19 5/8 (500)	23 5/8 (600)	27 1/2 (700)	29 1/2 (750)	31 1/2 (800)	35 3/8 (900)	39 3/8 (1000)	47 1/4 (1200)
	OSM inches/mm	28 1/2 (725)	27 1/2 (700)							
		4070	5070	6070	7070	7570	8070	9070	10070	12070
		4075	5075	6075	7075	7575	8075	9075	10075	12075
		4080	5080	6080	7080	7580	8080	9080	10080	12090
	4090	5090	6090	7090	7590	8090	9090	10090	12090	
	40100	50100	60100	70100	75100	80100	90100	100100	120100	
	40120	50120	60120	70120	75120	80120	90120	100120	120120	
	40140	50140	60140	70140	75140	80140	90140	100140	120140	




ALL WEATHER
AT HOME

Terra

2700 Series | SINGLE HUNG

ELEVATIONS
CSH-V

OPENING WIDTH

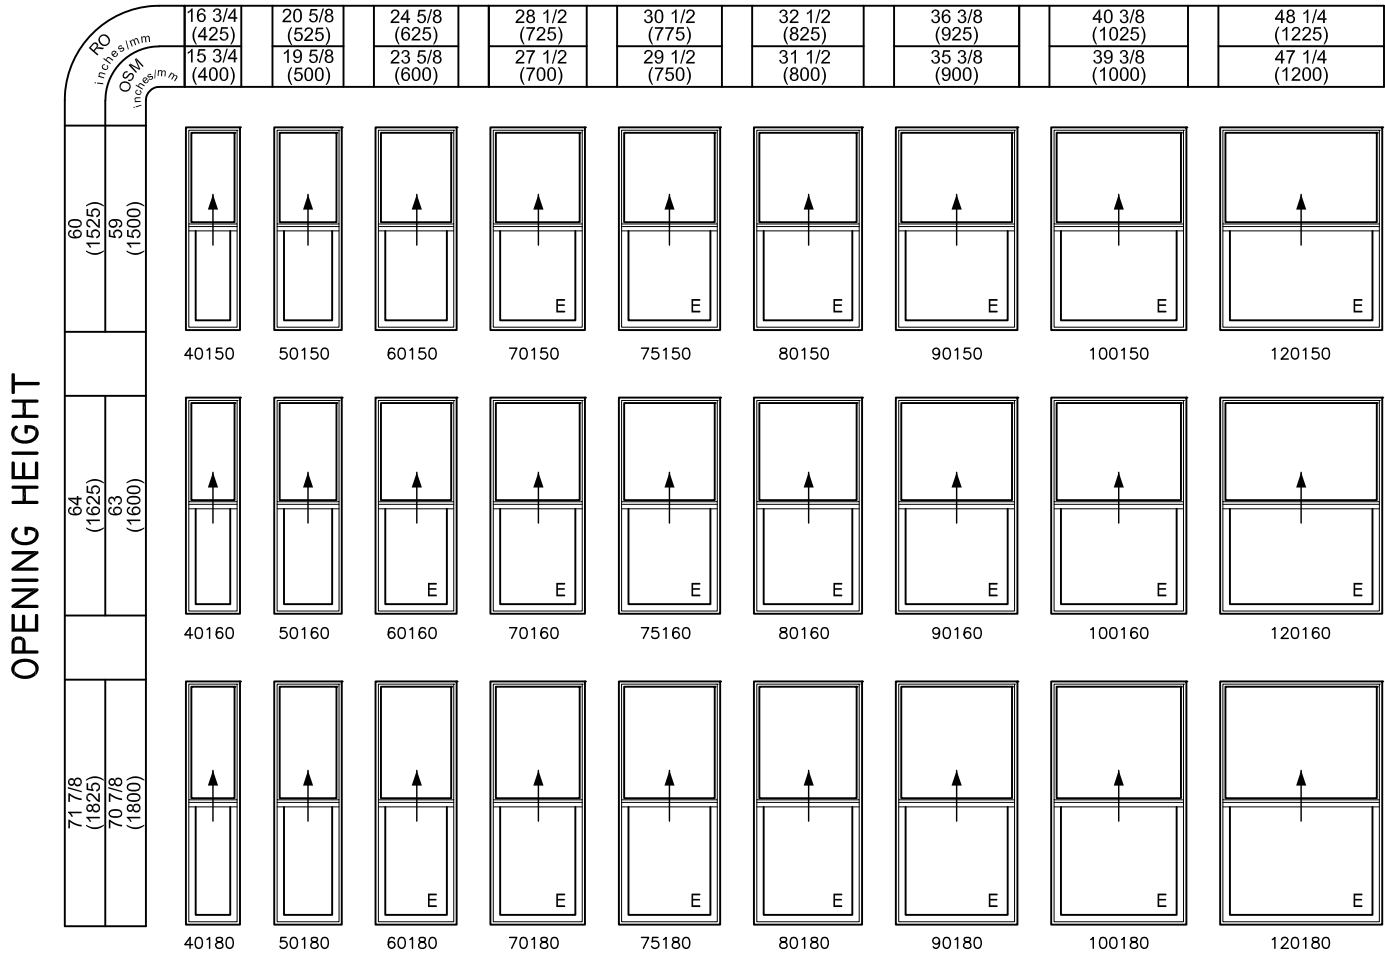

E = THESE WINDOWS MEET CANADIAN EGRESS REQUIREMENTS.



ALL WEATHER
AT HOME

Terra

2700 Series | PICTURE

ELEVATIONS
CP-P

OPENING WIDTH

RO Inches/mm		OPENING WIDTH									
		16 3/4 (425)	20 5/8 (525)	24 5/8 (625)	28 1/2 (725)	30 1/2 (775)	32 1/2 (825)	36 3/8 (925)	40 3/8 (1025)	48 1/4 (1225)	56 1/8 (1425)
OSM Inches/mm		15 3/4 (400)	19 5/8 (500)	23 5/8 (600)	27 1/2 (700)	29 1/2 (750)	31 1/2 (800)	35 3/8 (900)	39 3/8 (1000)	47 1/4 (1200)	55 1/8 (1400)
OPENING HEIGHT	16 3/4 (425)										
	20 5/8 (525)										
	24 5/8 (625)										
	28 1/2 (725)										
	30 1/2 (775)										
	32 1/2 (825)										
	36 3/8 (925)										
	40 3/8 (1025)										
	48 1/4 (1225)										
	56 1/8 (1425)										



ALL WEATHER
AT HOME

Terra

2700 Series | PICTURE

ELEVATIONS
CP-P

		OPENING WIDTH										
		16 3/4 (425)	20 5/8 (525)	24 5/8 (625)	28 1/2 (725)	30 1/2 (775)	32 1/2 (825)	36 3/8 (925)	40 3/8 (1025)	48 1/4 (1225)	56 1/8 (1425)	
OPENING HEIGHT	60 (1525)											
	64 (1625)											
	71 7/8 (1825)											
	78 3/4 (2025)											
	83 5/8 (2125)											*
	95 1/2 (2425)									*		*
	OSM (mm)	15 3/4 (400)	19 5/8 (500)	23 5/8 (600)	27 1/2 (700)	29 1/2 (750)	31 1/2 (800)	35 3/8 (900)	39 3/8 (1000)	47 1/4 (1200)	55 1/8 (1400)	
	40150	50150	60150	70150	75150	80150	90150	100150	120150	140150		
	40160	50160	60160	70160	75160	80160	90160	100160	120160	140160		
	40180	50180	60180	70180	75180	80180	90180	100180	120180	140180		
	40200	50200	60200	70200	75200	80200	90200	100200	120200	140200		
	40210	50210	60210	70210	75210	80210	90210	100210	120210	140210	*	
	40240	50240	60240	70240	75240	80240	90240	100240	120240	140240	*	

* = NOT AVAILABLE IN TRIPANE.



ALL WEATHER
AT HOME

Terra

2700 Series | PICTURE

ELEVATIONS
CP-P

		OPENING WIDTH					
		60 (1525)	64 (1625)	71 7/8 (1825)	79 3/4 (2025)	83 5/8 (2125)	95 1/2 (2425)
OPENING HEIGHT	16 3/4 (425)						
	15 3/4 (400)						
	20 5/8 (525)	15040	16040	18040	20040	21040	24040
	19 5/8 (500)	15050	16050	18050	20050	21050	24050
	24 5/8 (625)	15060	16060	18060	20060	21060	24060
	23 5/8 (600)	15070	16070	18070	20070	21070	24070
	28 1/2 (725)	12075	16075	18075	20075	21075	24075
	27 1/2 (700)	15080	16080	18080	20080	21080	24080
	30 1/2 (775)	15090	16090	18090	20090	21090	24090
	29 1/2 (750)	150100	160100	180100	200100	210100	240100
32 1/2 (825)	150120	160120	180120	200120	210120	240120	
31 1/2 (800)	150140	160140	180140	200140	210140	240140	
36 3/8 (925)							
35 3/8 (900)							
40 3/8 (1025)							
39 3/8 (1000)							
48 1/4 (1225)							
47 1/4 (1200)							
56 1/8 (1425)							
55 1/8 (1400)							

		OPENING WIDTH					
		60 (1525) 59 (1500)	64 (1625) 63 (1600)	71 7/8 (1825) 70 7/8 (1800)	79 3/4 (2025) 78 3/4 (2000)	83 5/8 (2125) 82 5/8 (2100)	95 1/2 (2425) 94 1/2 (2400)
OPENING HEIGHT	60 (1525) 59 (1500)						
	150150	160150	180150	200150	210150	240150	
	64 (1625) 63 (1600)						
	150160	160160	180160	200160	210160	240160	
	71 7/8 (1825) 70 7/8 (1800)						
	150180	160180	180180	200180	210180	240180	
	79 3/4 (2025) 78 3/4 (2000)						
150200	160200	180200	200200	210200			
83 5/8 (2125) 82 5/8 (2100)							
150210	160210	180210	200210	210210			
95 1/2 (2425) 94 1/2 (2400)							
150240	160240	180240					

* = NOT AVAILABLE IN TRIPANE.