

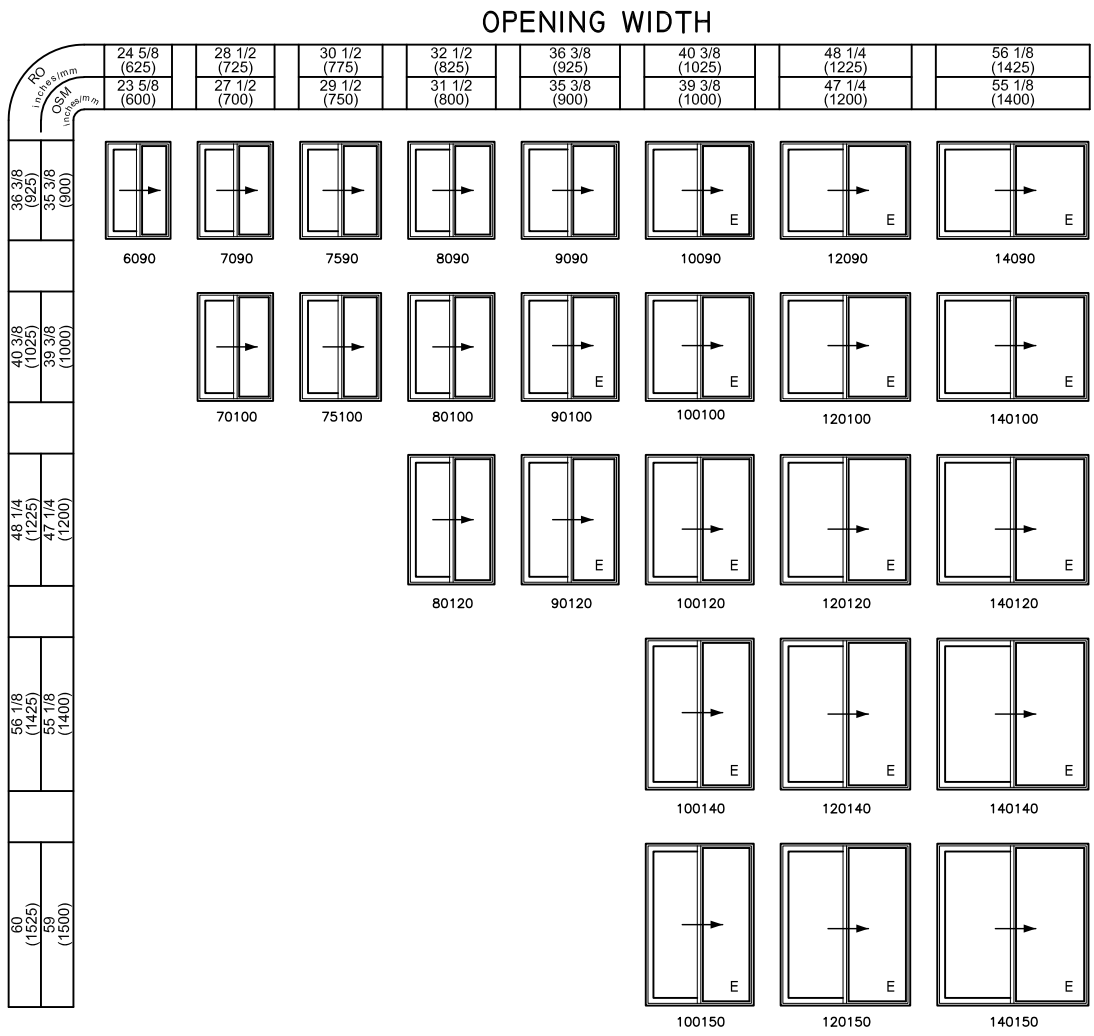






































# Terra

## 2750 Series | GLIDER

		OPENING WIDTH							
		24 5/8 (625)	28 1/2 (725)	30 1/2 (775)	32 1/2 (825)	36 3/8 (925)	40 3/8 (1025)	48 1/4 (1225)	56 1/8 (1425)
OPENING HEIGHT	RO inches/mm	23 5/8 (600)	27 1/2 (700)	29 1/2 (750)	31 1/2 (800)	35 3/8 (900)	39 3/8 (1000)	47 1/4 (1200)	55 1/8 (1400)
	OSM inches/mm	16 3/4 (425)	15 3/4 (400)						
	20 5/8 (525)	6040	7040	7540	8040	9040	10040	12040	14040
	19 5/8 (500)	6050	7050	7550	8050	9050	10050	12050	14050
	24 5/8 (625)	6060	7060	7560	8060	9060	10060	12060	14060
	23 5/8 (600)	6070	7070	7570	8070	9070	10070	12070	14070
	28 1/2 (725)								
	27 1/2 (700)								
	30 1/2 (775)	6075	7075	7575	8075	9075	10075	12075	14075
	29 1/2 (750)								
	32 1/2 (825)	6080	7080	7580	8080	9080	10080	12080	14080
	31 1/2 (800)								












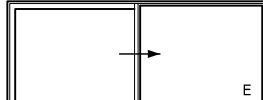





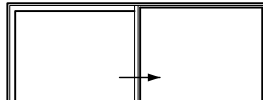





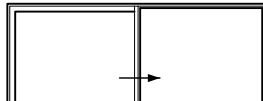





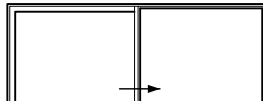
E = THESE WINDOWS MEET CANADIAN EGRESS REQUIREMENTS.



		OPENING WIDTH					
		(1525)	64 (1625)	71 7/8 (1825)	29 3/4 (2025)	83 5/8 (2125)	95 1/2 (2425)
		59 (1500)	63 (1600)	70 7/8 (1800)	78 3/4 (2000)	82 5/8 (2100)	94 1/2 (2400)
OPENING HEIGHT	RO 16 3/4 (425) OS/MS 15 3/4 (400)						
	20 5/8 (525) 19 5/8 (500)						
	24 5/8 (625) 23 5/8 (600)						
	28 1/2 (725) 27 1/2 (700)						
	30 1/2 (775) 29 1/2 (750)						
	32 1/2 (825) 31 1/2 (800)						

E = THESE WINDOWS MEET CANADIAN EGRESS REQUIREMENTS.

OPENING WIDTH

RO Inches/mm OS&A Inches/mm	64 (1625)		71 7/8 (1825)		78 3/4 (2000)		83 5/8 (2125)		95 1/2 (2425)	
	59 (1500)	63 (1600)	70 7/8 (1800)	78 3/4 (2000)	82 5/8 (2100)	94 1/2 (2400)				
36 3/8 (925)										
35 3/8 (900)	15090	16090	18090	20090	21090	24090				
40 3/8 (1025)										
39 3/8 (1000)	150100	160100	180100	200100	210100	240100				
48 1/4 (1225)										
47 1/4 (1200)	150120	160120	180120	200120	210120	240120				
56 1/8 (1425)										
55 1/8 (1400)	150140	160140	180140	200140	210140	240140				
60 (1525)										
59 (1500)	150150	160150	180150	200150	210150	240150				

E = THESE WINDOWS MEET CANADIAN EGRESS REQUIREMENTS.



ALL WEATHER  
AT HOME

# Terra

## 2750 Series | SINGLE HUNG

ELEVATIONS  
CSH-V

		OPENING WIDTH								
		16 3/4 (425)	20 5/8 (525)	24 5/8 (625)	28 1/2 (725)	30 1/2 (775)	32 1/2 (825)	36 3/8 (925)	40 3/8 (1025)	48 1/4 (1225)
OPENING HEIGHT	RO inches/mm OSM inches/mm	15 3/4 (400)	19 5/8 (500)	23 5/8 (600)	27 1/2 (700)	29 1/2 (750)	31 1/2 (800)	35 3/8 (900)	39 3/8 (1000)	47 1/4 (1200)
	28 1/2 (725)									
	30 1/2 (775)									
	32 1/2 (825)									
	36 3/8 (925)									
	40 3/8 (1025)									
	48 1/4 (1225)									
	55 1/8 (1425)									



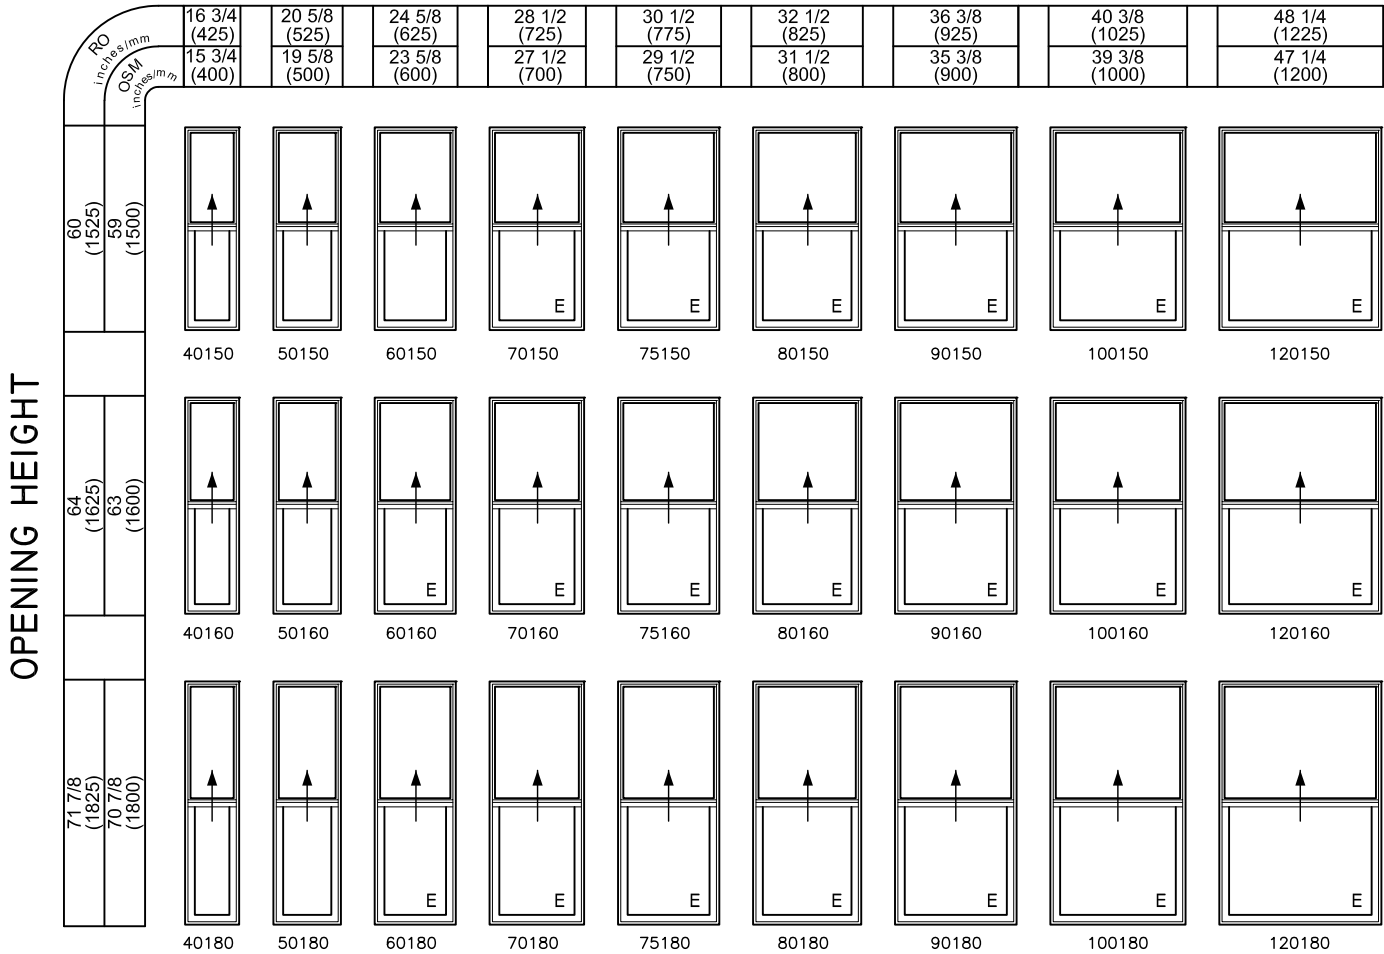
ALL WEATHER  
AT HOME

# Terra

## 2750 Series | SINGLE HUNG

ELEVATIONS  
CSH-V

### OPENING WIDTH



E = THESE WINDOWS MEET CANADIAN EGRESS REQUIREMENTS.



ALL WEATHER  
AT HOME

# Terra

## 2750 Series | PICTURE

ELEVATIONS  
CP-P

### OPENING WIDTH

RO Inches/mm		OPENING WIDTH									
		16 3/4 (425)	20 5/8 (525)	24 5/8 (625)	28 1/2 (725)	30 1/2 (775)	32 1/2 (825)	36 3/8 (925)	40 3/8 (1025)	48 1/4 (1225)	56 1/8 (1425)
OSM Inches/mm		15 3/4 (400)	19 5/8 (500)	23 5/8 (600)	27 1/2 (700)	29 1/2 (750)	31 1/2 (800)	35 3/8 (900)	39 3/8 (1000)	47 1/4 (1200)	55 1/8 (1400)
OPENING HEIGHT	16 3/4 (425)										
	20 5/8 (525)										
	24 5/8 (625)										
	28 1/2 (725)										
	30 1/2 (775)										
	32 1/2 (825)										
	36 3/8 (925)										
	40 3/8 (1025)										
	48 1/4 (1225)										
	56 1/8 (1425)										



# Terra

## 2750 Series | PICTURE

		OPENING WIDTH									
		16 3/4 (425)	20 5/8 (525)	24 5/8 (625)	28 1/2 (725)	30 1/2 (775)	32 1/2 (825)	36 3/8 (925)	40 3/8 (1025)	48 1/4 (1225)	56 1/8 (1425)
OPENING HEIGHT	RO inches/mm										
	OSM inches/mm	15 3/4 (400)	19 5/8 (500)	23 5/8 (600)	27 1/2 (700)	29 1/2 (750)	31 1/2 (800)	35 3/8 (900)	39 3/8 (1000)	47 1/4 (1200)	55 1/8 (1400)
	60 (1525)										
	64 (1625)										
	71 7/8 (1825)										
	73 3/4 (1875)										
	83 5/8 (2125)										*
	85 1/2 (2175)									*	*
		40150	50150	60150	70150	75150	80150	90150	100150	120150	140150
		40160	50160	60160	70160	75160	80160	90160	100160	120160	140160
		40180	50180	60180	70180	75180	80180	90180	100180	120180	140180
		40200	50200	60200	70200	75200	80200	90200	100200	120200	140200
		40210	50210	60210	70210	75210	80210	90210	100210	120210	140210
		40240	50240	60240	70240	75240	80240	90240	100240	120240	140240

\* = NOT AVAILABLE IN TRIPANE.



ALL WEATHER  
AT HOME

# Terra

## 2750 Series | PICTURE

ELEVATIONS  
CP-P

OPENING WIDTH

OPENING HEIGHT

	60 (1525)	64 (1625)	71 7/8 (1825)	79 3/4 (2025)	83 5/8 (2125)	95 1/2 (2425)
16 3/4 (425)	15040	16040	18040	20040	21040	24040
20 5/8 (525)	15050	16050	18050	20050	21050	24050
24 5/8 (625)	15060	16060	18060	20060	21060	24060
28 1/2 (725)	15070	16070	18070	20070	21070	24070
30 1/2 (775)	12075	16075	18075	20075	21075	24075
32 1/2 (825)	15080	16080	18080	20080	21080	24080
36 3/8 (925)	15090	16090	18090	20090	21090	24090
40 3/8 (1025)	150100	160100	180100	200100	210100	240100
48 1/4 (1225)	150120	160120	180120	200120	210120	240120
56 1/8 (1425)	150140	160140	180140	200140	210140	240140

		OPENING WIDTH					
		60 (1525)	64 (1625)	71 7/8 (1825)	79 3/4 (2025)	83 5/8 (2125)	95 1/2 (2425)
OPENING HEIGHT	60 (1525)	150150	160150	180150	200150 *	210150 *	240150 *
	64 (1625)	150160	160160	180160 *	200160 *	210160 *	240160 *
	71 7/8 (1825)	150180	160180 *	180180 *	200180 *	210180 *	240180 *
	79 3/4 (2025)	150200 *	160200 *	180200 *	200200 *	210200 *	
	83 5/8 (2125)	150210 *	160210 *	180210 *	200210 *	210210 *	
	82 5/8 (2100)						
	95 1/2 (2425)	150240 *	160240 *	180240 *			

\* = NOT AVAILABLE IN TRIPANE.